



TWIGA REACH MOWERS



TWIGA

Spearhead

TWIGA REACH
MOWERS

When you require a machine for the maintenance of hedgerows or the management of vegetation you should look no further than Spearhead.

With an extensive range of products, and a heritage and reputation built on providing professional solutions; Spearhead's TWIGA series really is the first choice for all of your reach mowing needs.

Spearhead boasts one of the most extensive fleets of reach mowers available in the world today.

Reaches range from 3.2 metres right through to 8.9 metres and are complimented by a variety of specialist attachments that mean your every need is catered for. With six different series within the portfolio, there is a specialist tool to suit your specific cutting requirement.

Acclaimed as a leading name and a specialist provider of mowing equipment Spearhead is now the first choice for Agricultural, Municipal, Military and Airport applications.

www.spearheadmachinery.com

[Twitter](#) [Facebook](#) [LinkedIn](#) [Instagram](#) [YouTube](#) [SpearheadWorld](#)





TWIGA

Machines

➤ Twiga Compact	4
➤ Twiga Classic	5
➤ Twiga Mid	6
➤ Twiga Pro	7
➤ Twiga Pro VFR	8
➤ Twiga Orbital	9
➤ Twiga Flex	10
➤ Controls	11
➤ Attachments	12
➤ Autopilot	13
➤ Specifications	14

TWIGA COMPACT



Overview

Spearhead's Twiga Compact series reach mower incorporates the same robust technology as larger models in the Spearhead range to bring enhanced levels of durability and reliability in a compact package.

An industrial grade reach mower, the Twiga Compact series can be fitted with a multitude of attachments, providing flexibility in operations and increasing utilisation in key applications such as local amenity and grounds maintenance contracts.

Available with sideways reach options of 3.2 and 4.2 metres and a choice of front or rear mounting, the Twiga Compact series is specified with a potent 35hp hydraulic system that provides exceptional output.

Features

- 3.2 and 4.2 metre reach options
- 25hp minimum tractor requirement
- 3-point linkage or DIN plate mounting
- Parallel arm geometry
- Fully independent hydraulic system
- 60 litre oil capacity
- Hydraulic safety breakout
- Low power requirement
- Choice of control systems
- Choice of cutting heads and attachments

Specification

Specification	TWIGA 320	TWIGA 420
Maximum reach	3.2m (10' 6")	4.2m (13' 9")
Machine weight*	450kg	480kg
Transport width	1.8m (5' 11")	1.8m (5' 11")
Oil tank capacity	60ltr	60ltr
Gear totally independent hydraulics	Standard	Standard
3-point linkage mounting	Standard	Standard
Right hand or left hand build	Optional	Optional
Tractor power required**	25hp	40hp
Tractor weight required**	1300kg	2000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions



Specification	TWIGA 470	TWIGA 500	TWIGA 545	TWIGA 595
Maximum reach	4.7m (15' 5")	5.0m (16' 5")	5.4m (17' 9")	5.9m (19' 4")
Machine weight*	970kg	1170kg	1360kg	1380kg
Transport width	2.4m (7' 10")	2.4m (7' 10")	2.6m (8' 6")	2.6m (8' 6")
Oil tank capacity	140ltr	190ltr	240ltr	240ltr
Gear totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Right hand or left hand build	Optional	Optional	Optional	Optional
Tractor power required**	60hp	70hp	90hp	95hp
Tractor weight required**	2250kg	2500kg	3500kg	3750kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

Features

- 4.7, 5.0, 5.4 and 5.9 metre reach options
- 60hp minimum tractor requirement
- 3-point linkage mounting
- Parallel arm geometry
- Fully independent 66hp hydraulic system
- 140 – 240 litre oil capacity
- Hydraulic safety breakout
- Low power requirement
- Choice of control systems
- Choice of cutting heads and attachments

Overview

Spearhead's Twiga Classic series reach mower incorporates a strong combination of power and flair with a stripped back look that contributes to the best value for money machine on the market.

Based on the highly acclaimed Excel 565 – a legend in the Spearhead stable, the Twiga Classic series satisfies the requirements of a host of different markets and applications whilst building on the same robust technology as larger models in the Spearhead range.

Powered by a 66hp hydraulic system, the Twiga classic series is available with sideways reach options of 4.7, 5.0, 5.4 and 5.9 metres with rear mounting as standard.



Overview

Combining many years of hedgecutter design with the latest technology, Spearhead's best-selling, Twiga Mid series reach mower provides exceptional performance, reliability, durability and ease of operation.

Power is delivered by a potent 66hp fully independent hydraulic system favoured by the most demanding of cutting professionals.

The machine is available with sideways reach options of 5.5, 6.0, 6.5 and 7.0 metres with rear mounting as standard. The 5.5 and 6.0 metre options can be delivered with a forward reach arm set for improved visibility, whilst the 6.5 and 7.0 metre versions are both telescopic as standard.

Features

- 5.5, 6.0, 6.5 and 7.0 metre reach options
- 90hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- 220 litre oil capacity
- Hydraulic safety breakout
- Fully independent 66hp hydraulic system
- LED rear lighting kit
- Choice of control systems
- Choice of cutting heads and attachments

Specification

Specification	TWIGA 555	TWIGA 600	TWIGA 655T	TWIGA 700T
Maximum reach	5.5m (18' 1")	6.0m (19' 8")	6.5m (21' 4")	7.0m (23' 0")
Machine weight*	1360kg	1380kg	1475kg	1505kg
Transport width	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")
Oil tank capacity	220ltr	220ltr	220ltr	220ltr
Gear totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	90hp	95hp	100hp	110hp
Tractor weight required**	3500kg	3750kg	4000kg	4500kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions



Specification	TWIGA PRO 560	TWIGA PRO 650T	TWIGA PRO 700T	TWIGA PRO 800T
Maximum reach	5.6m (18' 5")	6.5m (21' 4")	7.0m (23' 0")	8.0m (26' 3")
Machine weight*	1500kg	1650kg	1720kg	1850kg
Transport width	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")
Oil tank capacity	220ltr	220ltr	220ltr	220ltr
Gear totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	100-130hp	120-150hp	140-170hp	160-190hp
Tractor weight required**	4500kg	5000kg	6000kg	6500kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

Features

- 5.6, 6.5, 7.0 and 8.0 metre reach options
- 100hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 66hp or 85hp hydraulic system
- 220 litre oil capacity
- Hydraulic safety breakout
- LED rear lighting kit
- Choice of control systems
- Choice of cutting heads and attachments

Overview

The Twiga Pro series is the professional task master designed to cope with the toughest of jobs. Featuring a host of innovative design features the Twiga Pro is an extremely robust, high specification reach mower built to suit the specialist contractor and large scale farmer.

Delivered with an appearance that sets it apart, the Twiga Pro also represents the latest standards in advancing performance, reliability, durability and ease of operation in the modern reach mower sector.

Power is delivered standard by a potent 66hp fully independent hydraulic system and if further grunt is required a high output 85hp hydraulic system can be specified to appease the most demanding of green maintenance professionals.

TWIGA PRO VFR



Overview

The Twiga Pro series is the professional task master designed to cope with the toughest of jobs. Featuring a host of innovative design features the Twiga Pro is an extremely robust, high specification reach mower built to suit the specialist contractor and large scale farmer.

Available with a standard sideways reach option of 5.6 metres and backed up by further telescopic arm versions of 6.5, 7.0 and 8.0 metre, the Twiga Pro is designed to reach the areas others just can't get to. If those fixed arm versions were not enough a further two Variable Forward Reach models (an original Spearhead design) also complement the model series.

Features

- 6.0 and 6.5 metre reach options
- 120hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 66hp or 85hp hydraulic system
- 220 litre oil capacity
- Hydraulic safety breakout
- LED rear lighting kit
- Choice of control systems
- Choice of cutting heads and attachments

Specification

Specification	TWIGA PRO 600VFR	TWIGA PRO 650VFR
Maximum reach	6.0m (19' 8")	6.5m (21' 4")
Machine weight*	1700kg	1750kg
Transport width	2.5m (8' 2")	2.5m (8' 2")
Oil tank capacity	220ltr	220ltr
Gear totally independent hydraulics	Standard	Standard
3-point linkage mounting	Standard	Standard
Axle mounting	Optional	Optional
Right hand or left hand build	Optional	Optional
LED rear lighting kit	Standard	Standard
Tractor power required**	120-150hp	140-150hp
Tractor weight required**	5000kg	6000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions



Specification	TWIGA ORBITAL 606	TWIGA ORBITAL 686	TWIGA ORBITAL 726T	TWIGA ORBITAL 836T
Maximum reach	6.0m (19' 8")	6.8m (22' 4")	7.2m (23' 8")	8.3m (27' 3")
Machine weight*	2155kg	2315kg	2375kg	2400kg
Transport width	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")
Oil tank capacity	230ltr	230ltr	230ltr	230ltr
Piston totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
Rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	120hp	130hp	140hp	150hp
Tractor weight required**	4500kg	4750kg	5000kg	6000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

Features

- 6.0, 6.8, 7.2 and 8.3 metre reach options
- 120hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 80hp hydraulic system
- 230 litre oil capacity
- Hydraulic safety breakout
- Rear lighting kit
- Ability to cut either side of the machine
- Choice of cutting heads and attachments

Overview

Seeing is believing when you discover the Twiga Orbital series at work. The innovative design helps cut costs and time spectacularly with the flexibility to cut on both sides of the machine.

Innovative 180 degree slew enables the operator to mow either side of the tractor cab, with switching possible even whilst on the move. There are no pins to remove or no unhitching, thus reducing the time lost when travelling between passes.

Power is delivered standard by an 80hp fully independent piston hydraulic system which allows exceptional performance in intensive grass mowing applications.



Overview

The Twiga Flex series is the most prestigious and feature packed reach mower in the Spearhead range. With a multitude of high specification components the machine provides the most luxurious, high output reach mower combination on the market.

Featuring an arm-set that can be shifted through 140 degrees, the Twiga Flex series offers 50 degrees more forward travel than a traditional machine and can cut in every positional degree to allow the operator ultimate visibility.

Coupled with the visionary 'rotorflex' head rotation system the 70 centimetre offset slew pivot allows the arm to be bought alongside the tractor as far forward as, and in line with the front linkage if desired by the simple adjustment of the machines slewing column.

Features


- 6.7, 7.4, 8.0 and 8.9 metre reach options
- 120hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 80hp load sensing hydraulic system
- 220 litre oil capacity
- Hydraulic safety breakout
- Dual Rotorflex
- Ability to cut throughout the full arc of travel
- Choice of cutting heads and attachments

Specification

	TWIGA FLEX 670	TWIGA FLEX 740	TWIGA FLEX 800T	TWIGA FLEX 890T
Maximum reach	6.7m (22' 0")	7.4m (24' 3")	8.0m (26' 3")	8.9m (29' 2")
Machine weight*	2100kg	2200kg	2550kg	2660kg
Transport width	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")
Oil tank capacity	220ltr	220ltr	220ltr	220ltr
Piston totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	100-130hp	120-150hp	120-150hp	140-170hp
Tractor weight required**	4500kg	4750kg	5000kg	6000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

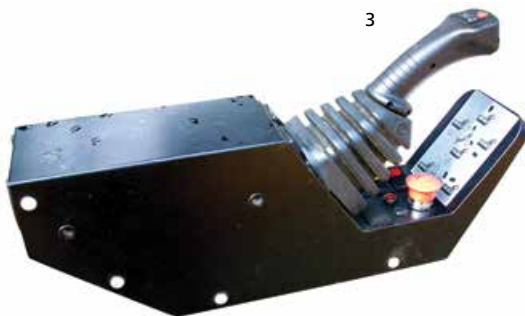

1. Cable controls

Progressive cable controls provide both individual and simultaneous operation of the arm and attachment angling features of the machine at the comfort of the operator.

2. Mini Pilot electric proportional controls

The Mini Pilot control system offers electric proportional control of the lift, reach and angling functions by moving one small joystick. This option gives the driver a high specification, responsive operating system for compact in cab mounting.

3. HP2 hydraulic proportional controls

The classic HP2 low pressure oil over oil hydraulic proportional control system is available as an option. Ergonomically arranged for logical directional movement and based on technology used widely in the construction industry the HP2 offers simultaneous operation for all services in one convenient package.


Defined by a reliability proven through years of service on the Spearhead EXCEL Range the HP2 system is the only single lever system you will ever need and will keep you working comfortably long after your competitors

4. Pro Pilot hydraulic proportional controls

Pro Pilot sets a new standard for hydraulic / electric proportional reach mower control systems. A more compact package with additional remote mounting for specific operator placement allows the machine to be more suited to mounting in modern tractor cabs.

Benefitting from additional functions on the joystick including proportional head angling, power slew, Telescope / VFR, Autopilot Cancel and Head Float all allowing the operator to manage the machine without moving their hand away from the joystick.

TWIGA ATTACHMENTS

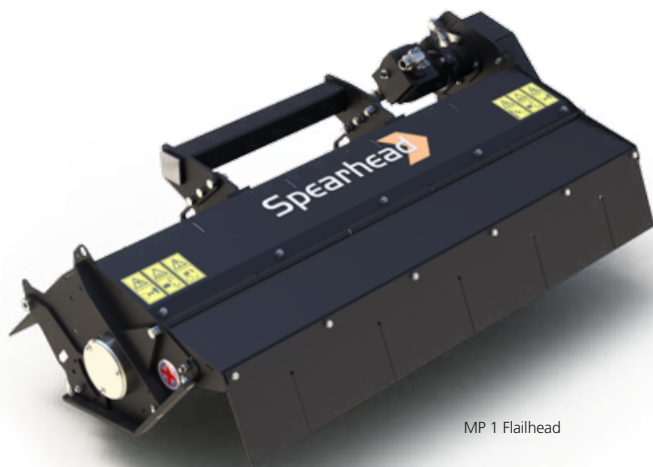

MP 1 Flailhead



PB Flailhead

FLAILHEADS

The flailhead is the business end of your TWIGA Reach Mower. As your business tool, Spearhead understands that different operators have different cutting requirements and for this reason a wide range of flailheads and cutting attachments are offered to be tailored to your individual and specific needs.

MP Compact Flailhead

- 0.9 metre cutting width
- Direct drive hydraulic system
- Back to Back or D Flail options
- 4 inch diameter roller
- Adjustable front hood
- Front and rear flap kit
- Hydraulic roller option

MP 1 Flailhead

- 1.2 or 1.5 metre cutting widths
- Direct drive hydraulic system
- Heavy duty rotor with double helix flail layout
- 6 inch diameter roller
- Adjustable front hood
- Front and rear flap kit
- Hydraulic roller option

MP 2 Flailhead

- 1.2 or 1.5 metre cutting widths
- Direct drive hydraulic system
- Heavy duty rotor with double helix flail layout
- 6 inch diameter roller
- Adjustable front hood
- Front and rear flap kit
- Hydraulic roller option

PB Flailhead

- 1.2 or 1.5 metre cutting widths
- Belt drive hydraulic system
- Heavy duty rotor with double helix flail layout
- 6 inch diameter roller
- Adjustable front hood
- Front and rear flap kit
- Hydraulic roller option

Flails



Back to Back Flail

For high performance verge mowing.



D Flail

Suitable for hedge and grass cutting.



C Flail

Suitable for hedge and grass cutting.



T Flail

Heavy duty hedge cutting flail.

HL CUTTERBARS

The HL Cutterbar is used when trimming back light growth at up to 40mm diameter. Achieving a clean cut on even the smallest branches, the HL Cutterbar can be mounted on the complete TWIGA range.

HL Features

- 1.5, 1.8 and 2.1 metre cutting widths
- Cuts up to 40mm branch diameter
- Up to 400 strokes per minute
- Shear bolt head breakaway protection
- Quick change knives

HX CUTTERBARS

The HX Cutterbar is a heavy duty branch cutter used for dealing with trees and bushes with a diameter of up to 110mm to leave a clean cut finish.

HX Features

- 1.7, 2.3 and 2.7 metre cutting widths
- Cuts up to 110mm branch diameter
- High performance ram drive
- Heavy duty cutter plate
- Drive ram guarding

Cutterbar model	HL150	HL180	HL210	HX170	HX230	HX270
Working width	1.5m	1.8m	2.1m	1.7m	2.3m	2.7m
Max branch diameter	40mm	40mm	40mm	110mm	110mm	110mm
Weight	60kg	64kg	68kg	170kg	230kg	250kg





QUADSAW

The QuadSaw range incorporates four 4-blade saw models and is perfect for maintaining and pruning overgrown hedgerows, siding trees and maintaining areas around power lines. A perfectly clean cut is achieved and possible at a forward speed of up to 5 km/h.

Features

- 1.4, 1.6, 2.0 and 2.4 metre cutting widths
- Cuts branches from 5mm to 200mm in diameter
- 5 km/h working speed
- Shear bolt head breakaway protection
- Multi-rib belt drive
- Slimline chassis
- Lower disc protection
- Lightweight design

Model	LRS1402	LRS1601	LRS2002	LRS2401
Working width	1.4m	1.6m	2.0m	2.4m
Diamond saw blade	4 x 345mm	4 x 400mm	4 x 495mm	4 x 600mm
Max branch diameter	100mm	120mm	160mm	200mm
Weight	50kg	100kg	210kg	280kg



NARROW LANE BRACKET

The Narrow Lane Bracket fits between the cutting attachment and the dipper arm giving an extra angle of movement.

This enables the reach arm to cut within the width of the tractor which is ideal when working in narrow lanes (not applicable to TWIGA 320, 420 and 470 models). The Narrow Lane Bracket is powered by a single ram incorporated into the bracket for protection.

Features

- Allows cutting within width of tractor
- Ideal for maintaining narrow lanes
- Operated by in-cab controls
- Improves cutting head geometry
- Hydraulic ram protected within bracket
- Lightweight, strong and compact design

TWIGA AUTOPILOT



AUTOPILOT

The Spearhead Autopilot is an advanced automatic hands free control system which follows the ground contours when verge mowing, increasing working speed and efficiency.

The Autopilot system automatically controls the floatation of the flailhead to follow the ground contours without any operator input.

Features

- Automatically follows ground contours
- Increases working speed
- Reduces operator fatigue



TWIGA SPECIFICATION

RANGE	TWIGA COMPACT	TWIGA COMPACT	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA MID	TWIGA MID	TWIGA MID	TWIGA MID	TWIGA PRO
SPECIFICATION	TWIGA 320	TWIGA 420	TWIGA 470	TWIGA 500	TWIGA 545	TWIGA 595	TWIGA 555	TWIGA 600	TWIGA 655T	TWIGA 700T	TWIGA PRO 560
Maximum reach	3.2m (10' 6")	4.2m (13' 9")	4.7m (15' 5")	5.0m (16' 5")	5.4m (17' 9")	5.9m (19' 4")	5.5m (18' 1")	6.0m (19' 8")	6.5m (21' 4")	7.0m (23' 0")	5.6m (18' 5")
Machine weight*	450kg	480kg	970kg	1170kg	1360kg	1380kg	1360kg	1380kg	1475kg	1505kg	1500kg
Transport width	1.8m (5' 11")	1.8m (5' 11")	2.4m (7' 10")	2.4m (7' 10")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.5m (8' 2")
Oil tank capacity	60ltr	60ltr	140ltr	190ltr	240ltr	240ltr	220ltr	220ltr	220ltr	220ltr	220ltr
Gear totally independent hydraulics	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Piston totally independent hydraulics	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3-point linkage mounting	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Axle mounting	N/A	N/A	N/A	N/A	N/A	N/A	Optional	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
LED rear lighting kit	N/A	N/A	N/A	N/A	N/A	N/A	Standard	Standard	Standard	Standard	Standard
Rear lighting kit	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Tractor power required**	25hp	40hp	60hp	70hp	90hp	95hp	90hp	95hp	100hp	110hp	100-130hp
Tractor weight required**	1300kg	2000kg	2250kg	2500kg	3500kg	3750kg	3500kg	3750kg	4000kg	4500kg	4500kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

TWIGA SPECIFICATION

TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA ORBITAL	TWIGA ORBITAL	TWIGA ORBITAL	TWIGA ORBITAL	TWIGA FLEX	TWIGA FLEX	TWIGA FLEX	TWIGA FLEX
TWIGA PRO 650T	TWIGA PRO 700T	TWIGA PRO 800T	TWIGA PRO 600VFR	TWIGA PRO 650VFR	TWIGA ORBITAL 606	TWIGA ORBITAL 686	TWIGA ORBITAL 726T	TWIGA ORBITAL 836T	TWIGA FLEX 670	TWIGA FLEX 740	TWIGA FLEX 800T	TWIGA FLEX 890T
6.5m (21' 4")	7.0m (23' 0")	8.0m (26' 3")	6.0m (19' 8")	6.5m 21' 4")	6.0m (19' 8")	6.8m (22' 4")	7.2m (23' 8")	8.3m (27' 3")	6.7m (22' 0")	7.4m (24' 3")	8.0m (26' 3")	8.9m (29' 2")
1650kg	1720kg	1850kg	1700kg	1750kg	2155kg	2315kg	2375kg	2400kg	2100kg	2200kg	2550kg	2660kg
2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")
220ltr	220ltr	220ltr	220ltr	220ltr	230ltr	230ltr	230ltr	230ltr	220ltr	220ltr	220ltr	220ltr
Standard	Standard	Standard	Standard	Standard	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Optional	Optional	Optional	Optional	Optional	N/A	N/A	N/A	N/A	Optional	Optional	Optional	Optional
Standard	Standard	Standard	Standard	Standard	N/A	N/A	N/A	N/A	Standard	Standard	Standard	Standard
N/A	N/A	N/A	N/A	N/A	Standard	Standard	Standard	Standard	N/A	N/A	N/A	N/A
120-150hp	140-170hp	160-190hp	120-150hp	140-150hp	120hp	130hp	140hp	150hp	100-130hp	120-150hp	120-150hp	140-170hp
5000kg	6000kg	6500kg	5000kg	6000kg	4500kg	4750kg	5000kg	6000kg	4500kg	4750kg	5000kg	6000kg



📍 Green View, Salford Priors, Evesham Worcestershire, WR11 8SW, England

☎ +44 (0)1789 491860 📠 +44 (0)1789 778683 ✉ enquiries@spearheadmachinery.com

www.spearheadmachinery.com

🐦 [SpearheadWorld](#)

